

235NT Swivel Coupling



Premier's 235NT Swivel is a bit heavier duty than our 135NT Swivel (page 27) for those extra tough jobs. When rough uneven ground is a problem, the 235NT Swivel may be the answer. (**NOT** to be used with swivel-type drawbar eye.)

ORDERING INFORMATION

Coupling:

- 235NT


Optional Accessories:

- Latch Gage 14026 (page 66): To determine latch gap limit.


SPECIFICATIONS

Maximum Gross Trailer Weight:	60,000 lbs.	(27,215 kg)
Maximum Tongue Weight:	12,000 lbs.	(5,443 kg)
Ultimate Latch Capacity:	20,000 lbs.	(9,071 kg)
Maximum Eye X-Section:	1 11/16 in.	(43 mm)
Minimum Eye Opening:	2 1/8 in.	(54 mm)
Unit Weight:	33.5 lbs.	(15.2 kg)

DRAWING DETAIL

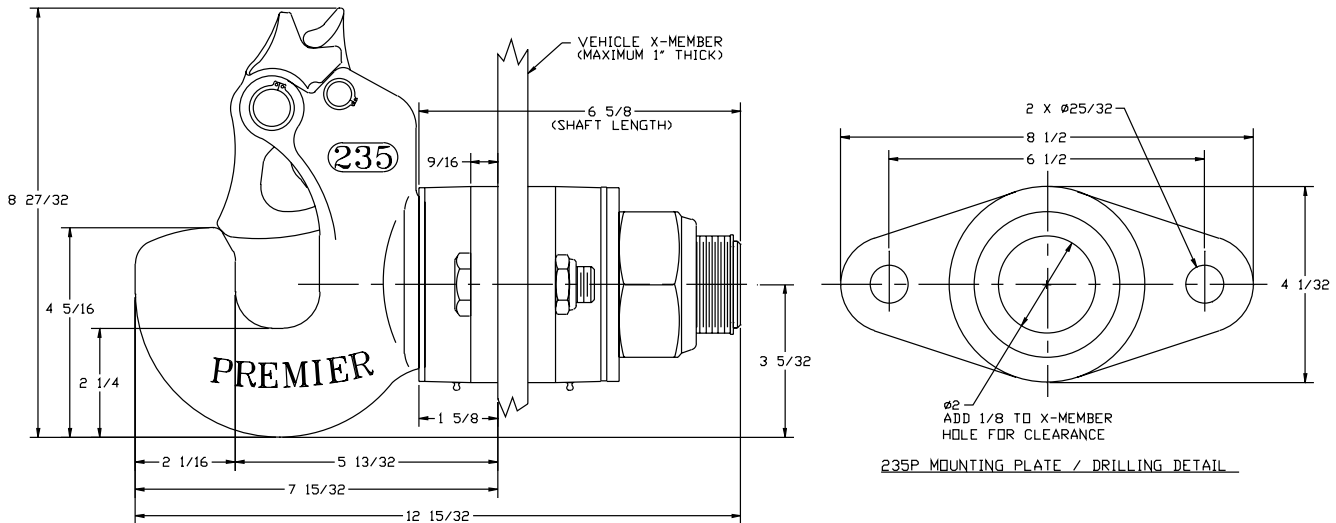

REPLACEMENT PART INFORMATION

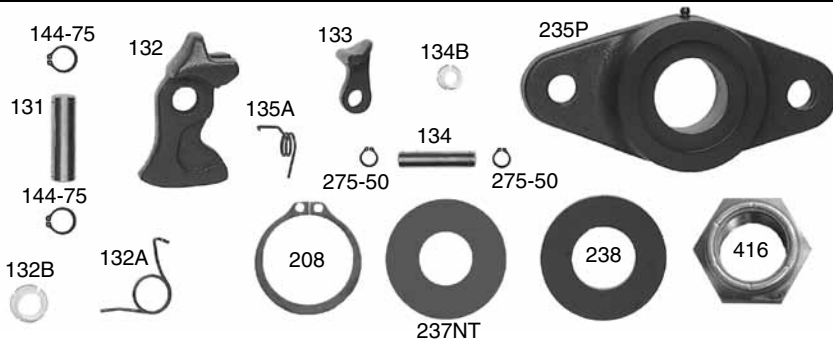

Model 235NT Parts Available:

131: Pin	144-75: Snap Ring (2)
132: Latch	275-50: Snap Ring (2)
132B: Bushing	235P: Mounting Plate (2)
132A: Spring	238: Washer
133: Latch Lock	208: Snap Ring
135A: Spring	416: Locknut
134: Pin	
237NT: Nylatron Bushing (2)	
134B: Bushing	

IMPORTANT GUIDELINES that apply to all Premier Non-Air Couplings

- Do not weld on any coupling assembly
- Always use Grade-8 fasteners properly torqued
- Do not apply lubricants to the coupling hook
- Clean & inspect coupling for damage & excessive wear prior to each and every use
- Lubricate all coupling components at a minimum of 90 day intervals
- Do not bind-up (Jackknife) any application as stresses can cause damage to products or components, resulting in failure and detachment of the trailer while in use

